



REV	DATE	CONTENT
V0	20200807	First release

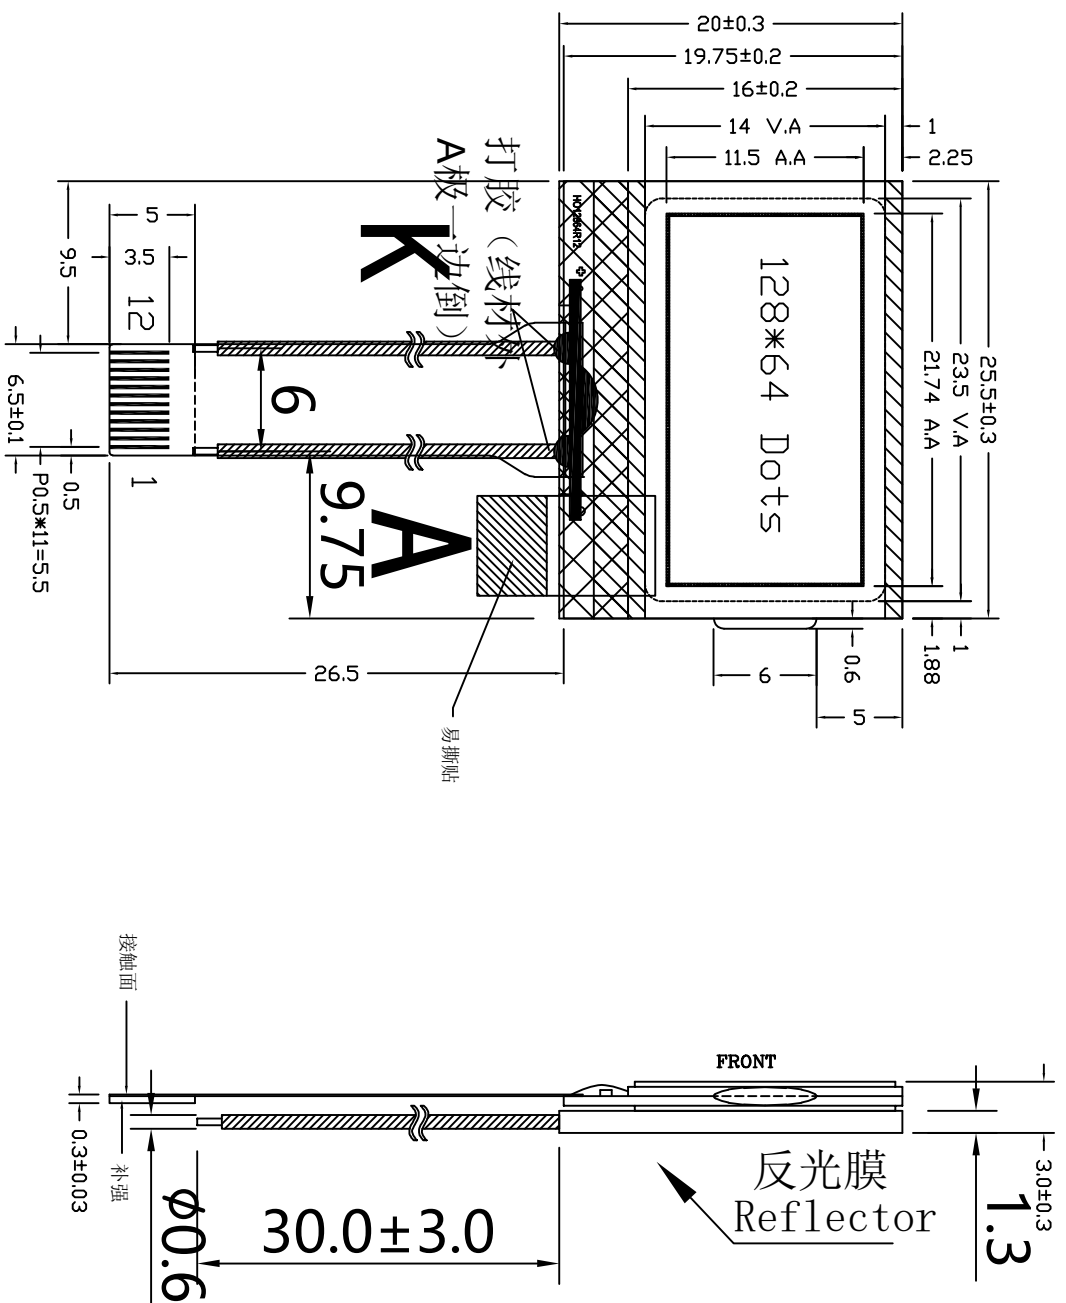

NO.	SYMBOL
1	/CS
2	/RESET
3	A0
4	SCL
5	SDA
6	VDD
7	VSS
8	VB0+
9	VB0-
10	VB1-
11	VB1+
12	VLCD

1	Lcd Type	STN,NEGATIVE MODE(BLUE)
2	Viewing Direction	6 O'clock
3	Drive Method	1/65D,1/9B
4	Polstrizer Mode	TRANSMISSIVE
5	VDD/VOP	VDD3.3V/ VOP9.0V(REF)
6	Operating Temperature	-20°C~70°C
7	Storage Temperature	-30°C~80°C
8	IC	UC1705 or Compatible
9	Backlight	White 1pos led, A-K=3.0±0.2,IF=15mA
10	Environmental requirements	ROHS compliance

The non-specified tolerance of dimension is+/-0.3mm.

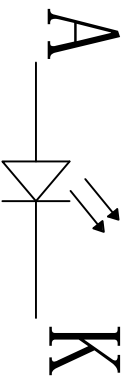

SCALE:		UNIT:		MODEL	TITLE
SCALE:	UNIT:	SCALE:	UNIT:		
1/1	mm	1/1	mm	HZY Display CO.,	
REV:	V0	PAGE:	1/1	HO12864R12-WMI010-00	
DRAW				LCM DRAWING	
CHECK				DWG NO.	
APPROVE	Xiahang				